



DESCRIPTION

The IXG-2C7-L is an IP video tenant station with a 7" LCD touchscreen for the IXG Series multi-tenant system. Each tenant can have up to 8 IXG-2C7/IXG-2C7-L's. The IXG-2C7-L station can answer calls from an entrance station, guard station, or individual door station. Once the call is answered, communication is hands-free (VOX).

A T-Coil hearing aid is able to pick up audio signals from the IXG-2C7-L. Touching the key button will activate the door release associated with the connected entrance station or door station. The IXG-2C7-L can selectively call other IXG-2C7-L's in the same tenant or collectively call associated mobile apps. The IXG-2C7-L can request an elevator to come to its floor. It will also retain a history of calls that it has received. The history capacity can be expanded by adding a microSD™ card.


FEATURES

- . T-Coil hearing aid compatibility
- . 802.3af PoE
- . 7" touchscreen
- . Hands-free audio communication
- . microSD™ card slot for added memory
- . Place calls to other stations within tenant
- . Call concierge/guard
- . Call elevator to floor
- . Monitor door stations

IXG-2C7-L

IP Video Tenant Station

FEATURE CALL-OUT

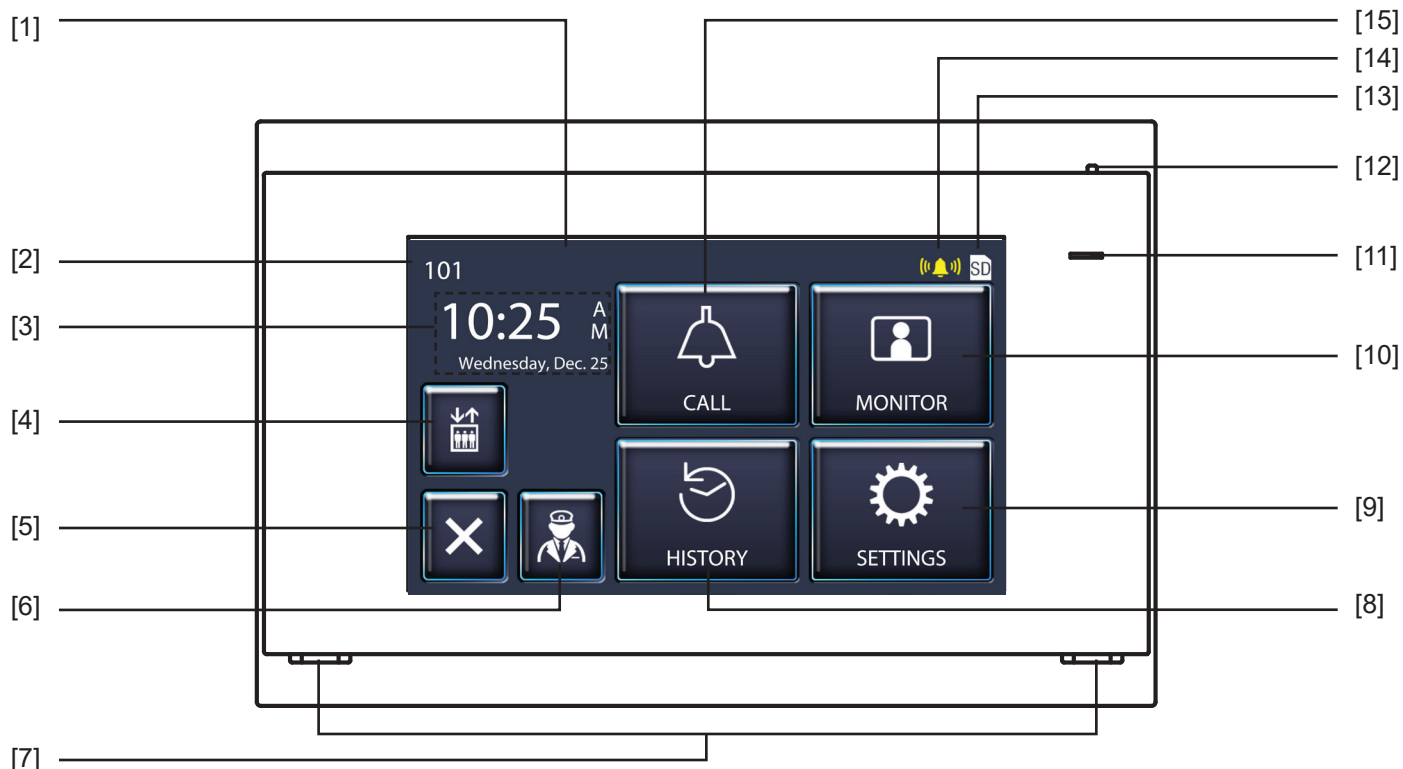

FEATURE CALL-OUT DEFINITIONS

- [1] LCD Touchscreen
- [2] Unit Number
- [3] Date and Time
- [4] Elevator Call Button
- [5] Off Button
- [6] Guard Call Button
- [7] Speaker
- [8] History Button
- [9] Settings Button
- [10] Monitor Button
- [11] Status Indicator (Blue)
- [12] Microphone
- [13] microSD™ Card Inserted Icon
- [14] Incoming Call Icon
- [15] Call Button

SPECIFICATIONS

- Power Source:** PoE (IEEE 802.3af class 0)
- Consumption:** 1.9W standby, 6W max.
- Screen:** 7" LCD TFT touchscreen
- Monitor resolution:** 800 x 400
- Communication:** Full-duplex
- Audio Codec:** G.711(μ-law, A-law)
- Video Codec:** H.264, MJPEG
- Protocol:** IPv4/v6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP/RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS, TLS
- Encryption:** TLS 1.0, 1.1, 1.2
- Operating Temp:** 32° ~ 104°F (0° ~ 40°C)
- Dimensions:** 5-13/16" H x 8-15/16" W x 1" D