

## DESCRIPTION

IXGW-GW Lifetime License Gateway Adaptor provides the AIPHONE IXG mobile app lifetime license code and a physical IXGW-GW adaptor (see full list of models below). Choose the model based on the location, and size of the project, rounding up from the number of tenants you have. Only one gateway adaptor is allowed per system. This adaptor allows the system to be programmed to call cloud-based mobile apps.

### USA models:

IXGW-GW-10  
IXGW-GW-25  
IXGW-GW-50  
IXGW-GW-75  
IXGW-GW-100  
IXGW-GW-150  
IXGW-GW-200  
IXGW-GW-250  
IXGW-GW-300  
IXGW-GW-350  
IXGW-GW-400  
IXGW-GW-450  
IXGW-GW-500

### Canada models:

IXGW-GW-10C  
IXGW-GW-25C  
IXGW-GW-50C  
IXGW-GW-75C  
IXGW-GW-100C  
IXGW-GW-150C  
IXGW-GW-200C  
IXGW-GW-250C  
IXGW-GW-300C  
IXGW-GW-350C  
IXGW-GW-400C  
IXGW-GW-450C  
IXGW-GW-500C


## FEATURES

- PoE compliant
- DIN rail mountable
- Ten simultaneous talk paths
- Supports up to 9,999 IXG apps
- Lifetime license for the following number of tenants:  
10, 25, 50, 75, 100, 150, 200, 250, 300, 350, 400, 450 or 500
- The IXG app is compatible with iOS® and Android® mobile devices.
- Up to eight apps can be registered per tenant.

# IXGW-GW Lifetime License

## Gateway Adaptor

### FEATURE CALL-OUT:

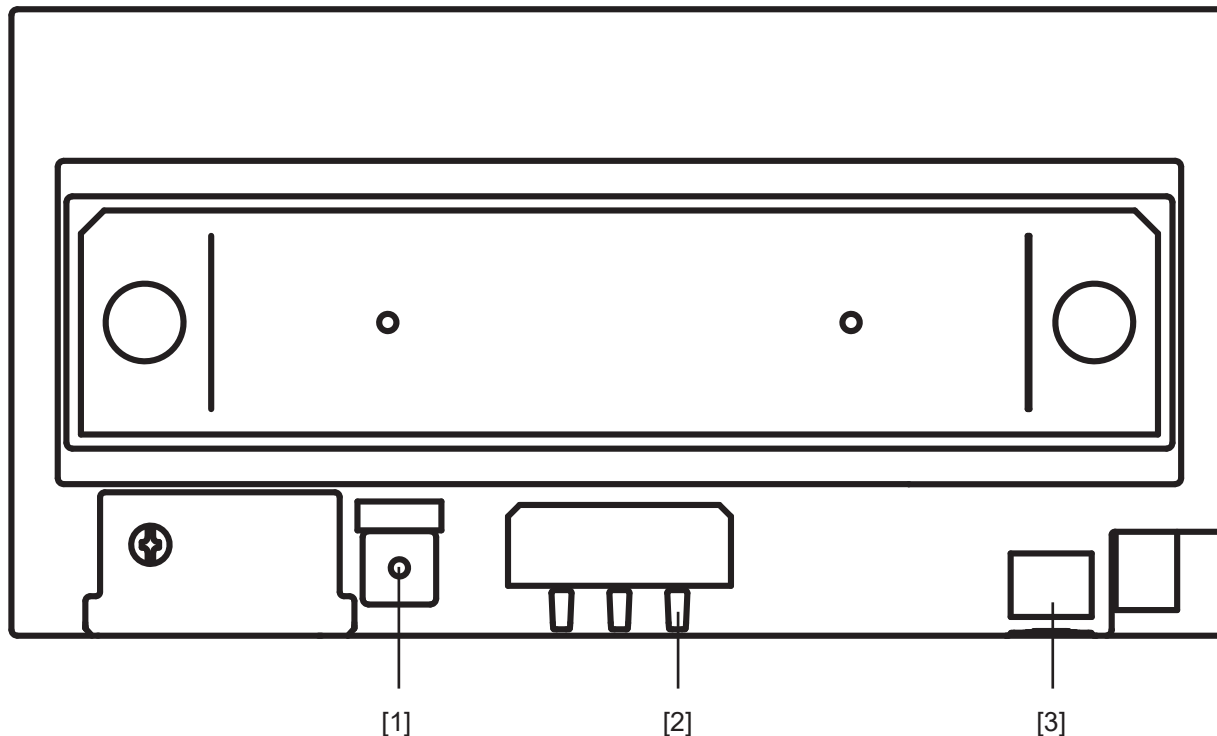

### FEATURE CALL-OUT DEFINITIONS

[1] Reset

[2] Status Indicator (orange/green)

[3] LAN Port (PoE)

### SPECIFICATIONS

Power Source: PoE (IEEE 802.3af class 0)

Consumption: 2.1W standby, 2.9W max

LAN: Ethernet  
(10BASE-T, 100BASE-TX)

Packet delivery: Unicast, Multicast

Protocol: IPv4/v6, TCP, UDP, SIP,  
HTTPS, RTP, RTCP, SRTP,  
SRTCP, IGMP, MLD, SFTP,  
DHCP, NTP, DNS, MQTT,  
ICE, DTLS, SDP

Channels: 10

Encryption: TLS 1.2

Operating Temp: 14° ~ 122°F (-10° ~ 50°C)

Dimensions: 4-1/4" H x 8-1/4" W x 2-3/8" D